

API相关

第三方应用集成禅道，API传递/获取禅道数据文档

api调用步骤

PATH_INFO方式

- 1、访问 <http://x.com/api-getsessionid.json>获取禅道session信息
- 2、使用上一步获取的session作为url参数访问 <http://x.com/user-login.json?account=account&password=123456&zentaosid=6v9bl9hp3o5chvdd46u5fg36g4>
- 3、<http://x.com/project-index-no.json?zentaosid=6v9bl9hp3o5chvdd46u5fg36g4>

GET方式

- 1、<http://127.0.0.1/zentao/index.php?m=api&f=getSessionID&t=json>
- 2、<http://127.0.0.1/zentao/index.php?m=user&f=login&t=json&account=admin&password=123456&zentaosid=k3g0h321bieq07a5ffh4i3q4h2>
- 3、<http://127.0.0.1/zentao/index.php?m=company&f=browse&t=json&zentaosid=k3g0h321bieq07a5ffh4i3q4h2>

新版本禅道也可以使用 <http://www.zentao.net/book/zentaopmshelp/integration-287.html>

相关资料文档: <https://devel.easycorp.cn/book/extension/api-intro-43.html>

测试工具: <https://www.postman.com/>

禅道企业版3.6测试环境: [http://root.damin.fun/1.zentao/zentaobiz_3_6/www/index.php?](http://root.damin.fun/1.zentao/zentaobiz_3_6/www/index.php?m=my&f=index)

[m=my&f=index](#) 账号密码: admin 1qaz2wsx

api接口查看方式: 后台 - 二次开发 - API 查看, api接口可能不全, 需要的可以在禅道创建对应内容, 看下传递的连接与需要的参数。

- 1 获取sessionid, 登录认证, 执行需要的接口调用, 登出
- 2 `http://root.damin.fun/1.zentao/zentaobiz_3_6/www/api-getsessionid.json`
- 3 `return: {"status":"success","data":{"title":"","sessionName":"","zentao36":"","sessionID":"","bbf671d453f8e24e50fe18b2b175b939","rand":1155,"pager":null},"md5":"3a78fef341b62460a9c00d4ca5ad466e"}`
- 4
- 5 登录: `http://root.damin.fun/1.zentao/zentaobiz_3_6/www/user-login.js`

```
n?zentaosid=db95dc9014e9b4f4522f93c8e27fb75c&account=admin&password=1
qaz2wsx
6 return:
7 {"status":"success","user":{"id":"1","dept":"0","account":"admin","role":"","realname":"admin","nickname":"","committer":"","avatar":"","birthday":"0000-00-00","gender":"f","email":"","skype":"","qq":"","mobile":"","phone":"","weixin":"","dingding":"","slack":"","whatsapp":"","address":"","zipcode":"","join":"0000-00-00","visits":"13","ip":"58.213.224.243","last":"2020-04-08 09:04:07","fails":"0","locked":"0000-00-0000:00:00","feedback":"0","ranzhi":"","ldap":"","score":"0","scoreLevel":"0","clientStatus":"offline","clientLang":"zh-cn","lastTime":"1585615481","admin":true,"modifyPassword":false,"rights":{"rights":[],"acls":[],"groups":[],"view":{"account":"admin","products":"1","projects":"1,2,3,4,5,6,7"},"company":"zentao36"}}
8
9 退出: http://root.damin.fun/1.zentao/zentaobiz_3_6/www/user-logout.json
```

创建任务

注意使用 formdata 提交，禅道新版本里面注意需要添加一个参数

以下都是使用 postman 进行测试

POST
http://root.damin.fun/1.zentao/zentaobiz_3_6/www/task-create-1--0.json?zentaosid=002636b4524d0ce8bb9e981c845dd361

Params
Authorization
Headers (9)
Body
Pre-request Script
Tests
Settings

none
form-data
x-www-form-urlencoded
raw
binary
GraphQL

KEY	VALUE
<input checked="" type="checkbox"/> type	design
<input checked="" type="checkbox"/> name	yandamin222444
<input checked="" type="checkbox"/> project	1
<input checked="" type="checkbox"/> module	0
<input checked="" type="checkbox"/> assignedTo[]	
<input checked="" type="checkbox"/> teamMember	
<input checked="" type="checkbox"/> status	wait
<input checked="" type="checkbox"/> pri	3
Key	Value

Body
Cookies (6)
Headers (14)
Test Results

Pretty
Raw
Preview
Visualize

```

{"result":"success","message":"\u4fdd\u5b58\u6210\u529f","locate":"/1.zentao/zentaobiz_3_6/www/project-browse-1-task.json"}


```

创建项目

创建模块，这块可能有点繁琐，可能需要在禅道中维护下或者从数据库创建下



创建需求

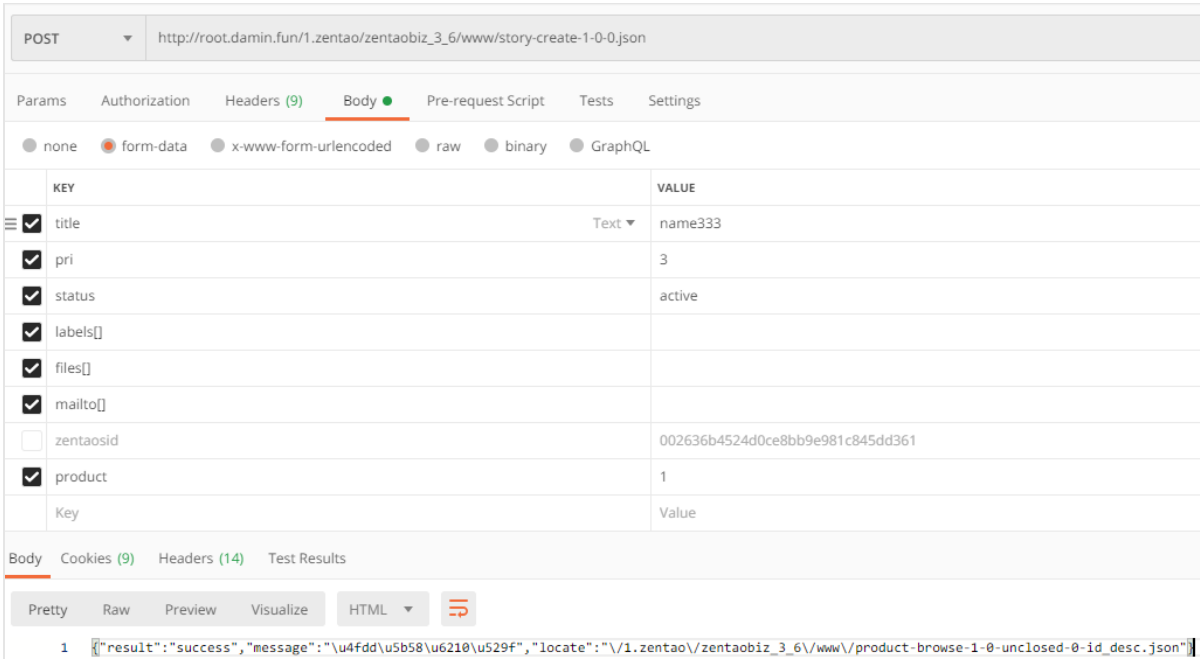

创建文档库

POST http://root.damin.fun/1.zentao/zentaobiz_3_6/www/doc-createLib.html

Params Authorization Headers (9) **Body** Pre-request Script Tests Settings

☐ none ☒ form-data ☐ x-www-form-urlencoded ☐ raw ☐ binary ☐ GraphQL

	KEY	VALUE
<input checked="" type="checkbox"/>	type	product
<input checked="" type="checkbox"/>	product	1
<input checked="" type="checkbox"/>	project	7
<input checked="" type="checkbox"/>	name	ceshiceshi
<input checked="" type="checkbox"/>	acl	default
<input checked="" type="checkbox"/>	users[]	



